WATER DISTRIBUTOR

FLECK 上下集散
FLECK TOP & BOTTOM DISTRIBUTOR

型号 MODEL	名称 NAME	通用罐体 TANKS	中心管 Central Tube
F 0601	6分富莱克上集散 3/4"Fleck top distributor	6"-16" Φ150-Φ400mm	3/4"
F 0602	6分富莱克下集散 3/4" Fleck bottom distributor	6"-16" Φ150-Φ400mm	3/4"
F 0611	1寸富莱克上集散 1"Fleck top distributor	6"-16" Φ150-Φ400mm	1"
F 0612	1寸富莱克下集散 1" Fleck bottom distributor	6"-16" Φ150-Φ400mm	1"

X - 流量 (GPM), 1GPM=227 L/H
Y - 压降 (PSI), 1PSI=0.007 Mpa

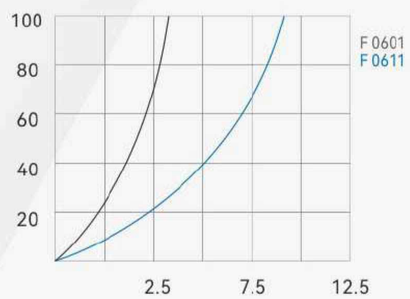





滤网式 上下集散
TOP AND BOTTOM DISTRIBUTOR WITH NET.

型号 MODEL	名称 NAME	通用罐体 TANKS	中心管 Central Tube
F 0601W	3/4"滤网式上集散 3/4" Top distributor	6"-15" Φ150-Φ300mm	3/4"
F 0602W	3/4"滤网式下集散 3/4" Bottom distributor	6"-12" Φ150-Φ300mm	3/4"

产品特性：采用进口ABS材料，注塑成型，与外径26.7MM的中心管粘接，滤网精度为100目，阻止杂质进入，外表美观，使用持久。

Part Details: Injection by Imported ABS and Net, Bonded to the center pipe with an outer diameter of 26.7MM The Net is 100 mesh, prevent impurities from entering.

注：IPSI=0.007Mpa, 1GPM=227L/H





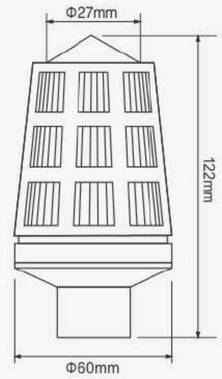

香菇头 上下集散
MUSHROOM TOPPED DISTRIBUTOR

型号 MODEL	名称 NAME		通用罐体 TANKS	中心管 Central Tube	缝隙 Gap
F 0603W	6分香菇头上集散	Mushroom top distribuor	6"-16" ϕ150-ϕ400mm	3/4"	0.25/0.5mm
F 0604W	6分香菇头下集散	Mushroom bottom distribuor	6"-16" ϕ150-ϕ400mm	3/4"	0.25/0.5mm
F 0613W	1寸香菇头上集散	Mushroom top distribuor	6"-16" ϕ150-ϕ400mm	1"	0.25/0.5mm
F 0614W	1寸香菇头下集散	Mushroom bottom distribuor	6"-16" ϕ150-ϕ400mm	1"	0.25/0.5mm
F 0603CW	6分加长香菇头上集散	Mushroom top distribuor	6"-16" ϕ150-ϕ400mm	3/4"	0.25/0.5mm
F 0604CW	6分加长香菇头下集散	Mushroom bottom distributor	6"-16" ϕ150-ϕ400mm	3/4"	0.25/0.5mm
F 0613CW	1寸加长香菇头上集散	Mushroom top distributor	6"-16" ϕ150-ϕ400mm	1"	0.25/0.5mm
F 0614CW	1寸加长香菇头下集散	Mushroom bottom distributor	6"-16" ϕ150-ϕ400mm	1"	0.25/0.5mm

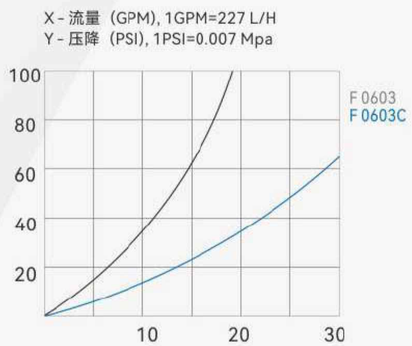



定流向 布水器
DIRECTIONAL WATER DISTRIBUTOR

型号 MODEL	名称 NAME		通用罐体 TANKS	中心管 Central Tube
F 0603D	6分香菇头上集散	Mushroomtopdistribuor	6"-16" ϕ150-ϕ400mm	3/4"
F 0604D	6分香菇头下集散	Mushroombottomdistribuor	6"-16" ϕ150-ϕ400mm	3/4"
F 0613D	1寸香菇头上集散	Mushroomtopdistribuor	6"-16" ϕ150-ϕ400mm	1"
F 0614D	1寸香菇头下集散	Mushroombottomdistribuor	6"-16" ϕ150-ϕ400mm	1"
F 182XD	汉堡头（下）	Bottonstack screen distribuor	12"-48" ϕ300-ϕ1200mm	50mm
F 173D	6寸上布水器	6" Thread topmountdistribuor	36"-80" ϕ900-ϕ2000mm	







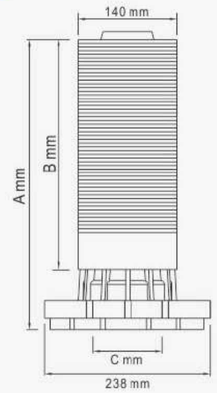

1.5" 顶装式上布水器(汉堡头)

TOP-MOUNTED UPPER DISTRIBUTOR (HAMBURGER HEAD)

型号 MODEL	名称 NAME	通用罐体 TANKS	中心管 Central Tube
F 182	182 上汉堡头/182 top stack screen	12"-48"/Φ300-Φ1200mm	48.5/50mm
F 182L	182L 螺纹口上汉堡头/182L -.thread(可配润新阀用)	12"-48"/Φ300-Φ1200mm	48.5/50mm
F 182X	182X 下汉堡头/182X bottom stack screen	12"-48"/Φ300-Φ1200mm	48.5/50mm
F 181L	181L 上汉堡头/181L top stack screen	12"-48"/Φ300-Φ1200mm	40mm
F 181X	181X 下汉堡头/181X bottom stack screen	12"-48"/Φ300-Φ1200mm	40mm

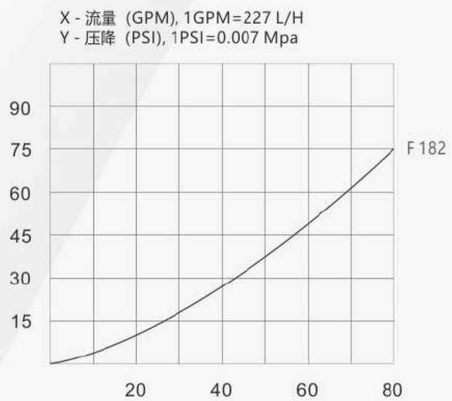

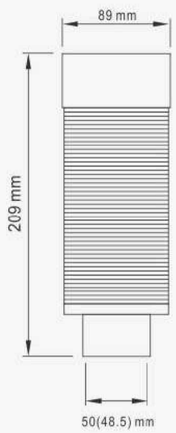

F 182

F 182L

F 182X

1.5" 顶装式上布水器(汉堡头)

TOP-MOUNTED UPPER DISTRIBUTOR (HAMBURGER HEAD)

型号 MODEL	名称 NAME	通用罐体 TANKS	中心管 Central Tube
F 183	183 上汉堡头/183 top stack screen	12"-48"/Φ300-Φ1200mm	50mm
F 183L	183 螺纹口上汉堡头/183 -.thread(可配润新阀用)	12"-48"/Φ300-Φ1200mm	50mm
F 183X	183 下汉堡头/183 bottom stack screen	12"-48"/Φ300-Φ1200mm	50mm
F 183C	183 上汉堡头加长/183 top stack screen lengthen	12"-48"/Φ300-Φ1200mm	50mm
F 183CL	183 螺纹口上汉堡头加长/183 -.thread(可配润新阀用)	12"-48"/Φ300-Φ1200mm	50mm
F 183CX	183 下汉堡头加长/183 bottom stack screen lengthen	12"-48"/Φ300-Φ1200mm	50mm

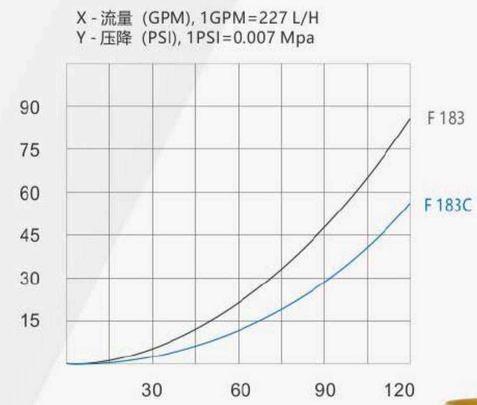

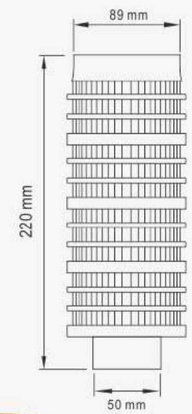



F 183

F 183CL

F 183X

2" 顶装式上布水器
TOP-MOUNTED UPPER DISTRIBUTOR

型号 MODEL	名称 NAME	通用罐体 TANKS	中心管 Central Tube
F 184	184 上汉堡头/184 top stack screen	12"–63"/ϕ300–ϕ1600mm	63mm
F 184L	184 螺纹口上汉堡头/184 –.thread(可配润新阀用)	12"–63"/ϕ300–ϕ1600mm	63mm
F 184X	184 下汉堡头/184 bottom stack screen	12"–63"/ϕ300–ϕ1600mm	63mm
F 185	185 上汉堡头/185 top stack screen	12"–63"/ϕ300–ϕ1600mm	63mm
F 185L	185 螺纹口上汉堡头/185 –.thread(可配润新阀用)	12"–63"/ϕ300–ϕ1600mm	63mm
F 185X	185 下汉堡头/185 bottom stack screen	12"–63"/ϕ300–ϕ1600mm	63mm

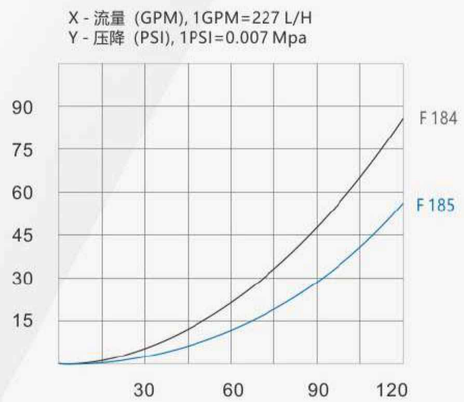

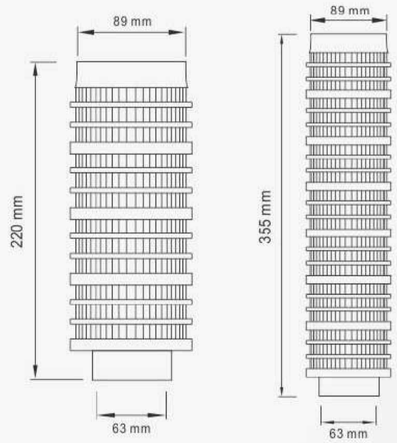

F 184 F 184L F 185L F 185X

4" 侧装上布水器
4"THREAD TOP MOUNT DIFFUSER

型号 MODEL	A	B	C	开口 PORT	通用罐体 TANKS	缝隙 Gap
F 5671	365	180	63	4"thread	12"-48"/ϕ300-1200mm	0.25/0.5mm
F 5672	480	290	63	4"thread	12"-48"/ϕ300-1200mm	0.25/0.5mm
F 5671Z	320	180	63/60.3	4"thread	12"-48"/ϕ300-1200mm	0.25/0.5mm
F 5672Z	435	290	63/60.3	4"thread	12"-48"/ϕ300-1200mm	0.25/0.5mm
F 5671F	365	180	63	4"thread	12"-48"/ϕ300-1200mm	0.25/0.5mm
F 5672F	480	290	63	4"thread	12"-48"/ϕ300-1200mm	0.25/0.5mm

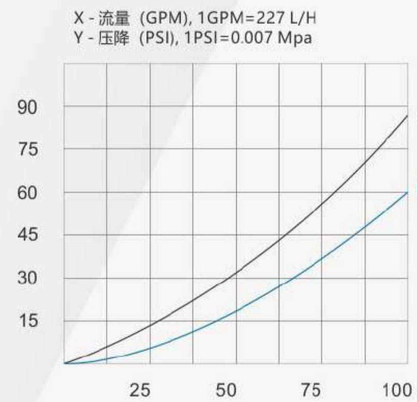

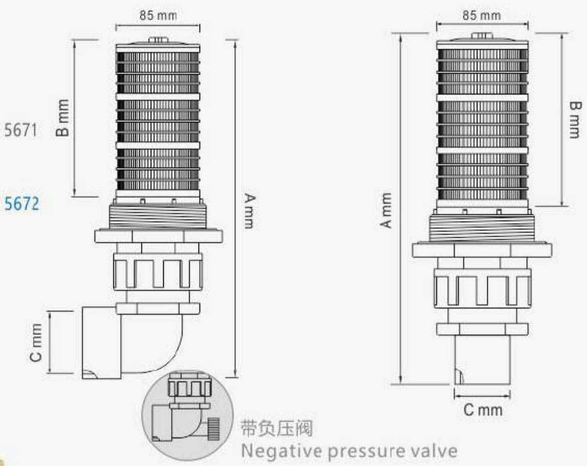

F 5671 Side type F 5672 F 5671F F 5672Z Direct type

6" 侧装上布水器
6"THREAD TOP MOUNT DIFFUSER

型号 MODEL	A	B	C	开口 PORT	通用罐体 TANKS
F 173	365	245	90/110/PT3"/NPT3"	6"flange	36"-80"/ϕ900-2000mm
F 175	445	330	90/110/PT3"/NPT3"	6"flange	36"-80"/ϕ900-2000mm
F 173-0.5	365	245	90/110/PT3"/NPT3"	6"flange	36"-80"/ϕ900-2000mm
F 175-0.5	445	330	90/110/PT3"/NPT3"	6"flange	36"-80"/ϕ900-2000mm
FB 173	275	245	G3"	6"flange	36"-80"/ϕ900-2000mm
FB 175	360	330	G3"	6"flange	36"-80"/ϕ900-2000mm
F3900S	240	325	140	6"Flange	36"-60"(900–1500)
F3900L	240	425	140	6"Flange	60"-80"(1500–2000)

备注：主体缝隙宽度有二种：0.25、0.5mm 默认标准为0.25mm
We have two gap type for screen: 0.25mm, 0.5mm, our stand gap is 0.25mm

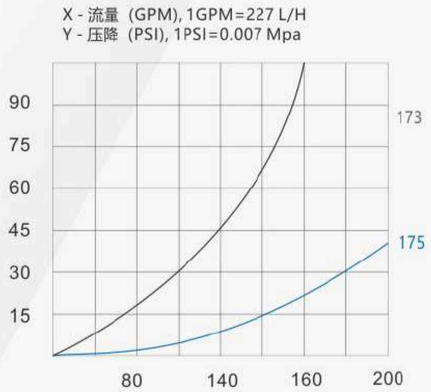

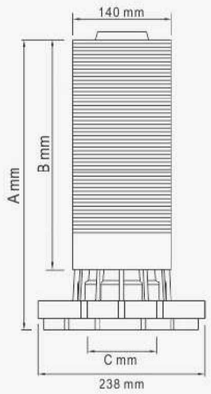

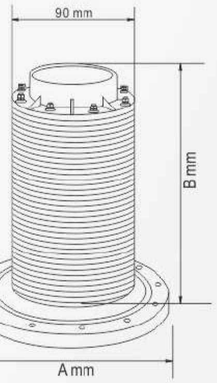

F 173

F 3900L

F 175

F 175-0.5

6" 侧装上布水器
6"THREAD TOP MOUNT DIFFUSER

型号 MODEL	A	B	C	开口 PORT	通用罐体 TANKS
F 172W	305	200	90/110/PT3"/NPT3"	6"flange	24"-40"/ϕ600-1000mm
F 173W	365	245	90/110/PT3"/NPT3"	6"flange	36"-80"/ϕ900-2000mm
F 175W	455	330	90/110/PT3"/NPT3"	6"flange	36"-80"/ϕ900-2000mm
FB 173W	275	245	G3"	6"flange	36"-80"/ϕ900-2000mm
FB 175W	360	330	G3"	6"flange	36"-80"/ϕ900-2000mm

The gap is 0.25mm

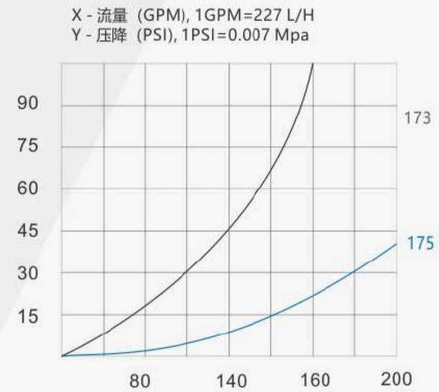

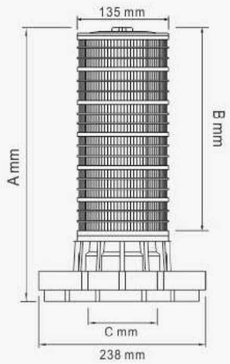

F 175W

F 173W

FB 175W

FB 173W

注：材质为PVDF可定制

6爪 顶装式六爪下布水器
TOP-MOUNTED SIX-CLAW LOWER DISTRIBUTOR

型号 MODEL	A	B	C	支管缝细 GAP	开口 PORT	通用罐体 TANKS
FU 6260	255	99	50/48.5/40	0.25mm	4" thread	12"–16"/ϕ300–ϕ400mm
FU 6370	365	155	50/48.5/40	0.25mm	4" thread	18"–21"/ϕ400–ϕ550mm
FU 6450	450	200	50/48.5/40	0.25mm	4" thread	24"/ϕ600mm
FU 6600	610	280	50/48.5/40	0.25mm	4" thread	30"/ϕ750mm
FU 6700	700	325	50/48.5/40	0.25mm	4" thread	36"/ϕ900mm
FU 6800	850	400	50/48.5/40	0.25mm	4" thread	40"/ϕ1000mm
FU 6900	940	445	50/48.5/40	0.25mm	4" thread	48"/ϕ1200mm

X - 流量 (GPM), 1GPM=227 L/H
Y - 压降 (PSI), 1PSI=0.007 Mpa

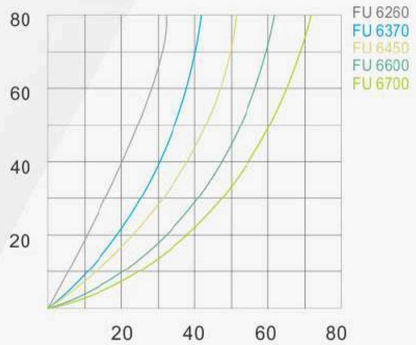

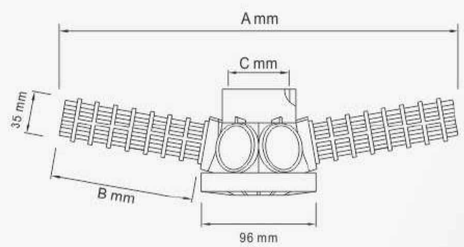

FU 6450

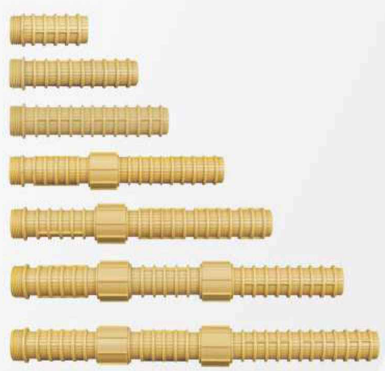

6爪 顶装式六爪下布水器(高流速)
TOP-MOUNTED SIX-CLAW LOWER DISTRIBUTOR(HIGH FLOW)

型号 MODEL	A	B	C	支管缝细 GAP	开口 PORT	通用罐体 TANKS
FU 6260B	310	132	50/48.5/63	0.2/0.25/0.5mm	4" thread	16"–18"/ϕ400–ϕ450mm
FU 6370B	430	197	50/48.5/63	0.2/0.25/0.5mm	4" thread	21"/ϕ550mm
FU 6450B	500	227	50/48.5/63	0.2/0.25/0.5mm	4" thread	24"/ϕ600mm
FU 6600B	620	290	50/48.5/63	0.2/0.25/0.5mm	4" thread	30"/ϕ750mm
FU 6700B	750	353	50/48.5/63	0.2/0.25/0.5mm	4" thread	36"/ϕ900mm
FU 6800B	870	416	50/48.5/63	0.2/0.25/0.5mm	4" thread	40"/ϕ1000mm
FU 6900B	990	479	50/48.5/63	0.2/0.25/0.5mm	4" thread	48"/ϕ1200mm

备注：主体缝隙宽度有三种：0.2、0.25、0.5mm 默认标准为0.25mm
We have three gap type for screen:0.2mm, 0.25mm, 0.5mm, our stand gap is 0.25mm

X - 流量 (GPM), 1GPM=227 L/H
Y - 压降 (PSI), 1PSI=0.007 Mpa

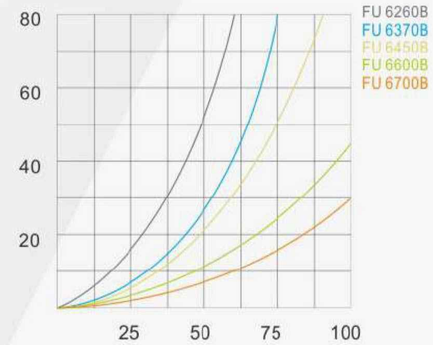

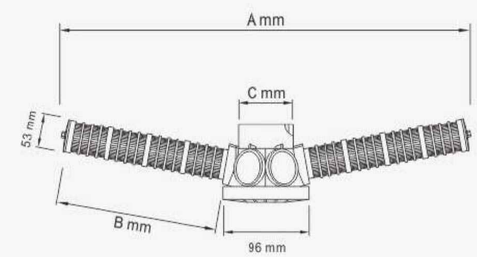

FU 6600B

12爪

2"接口适用于3150阀
如：FU6700B-63

8爪 顶装式八爪下布水器
TOP-MOUNTED EIGHT-CLAW LOWER DISTRIBUTOR

型号 MODEL	A	B	C	支管缝细 GAP	开口 PORT	通用罐体 TANKS
FU 8260	265	99	63	0.25mm	4" thread	12"–16"/ϕ300–ϕ400mm
FU 8370	375	155	63	0.25mm	4" thread	18"–21"/ϕ400–ϕ550mm
FU 8450	460	200	63	0.25mm	4" thread	24"/ϕ600mm
FU 8600	620	280	63	0.25mm	4" thread	30"/ϕ750mm
FU 8700	710	325	63	0.25mm	4" thread	36"/ϕ900mm
FU 8800	860	400	63	0.25mm	4" thread	40"/ϕ1000mm
FU 8900	950	445	63	0.25mm	4" thread	48"/ϕ1200mm

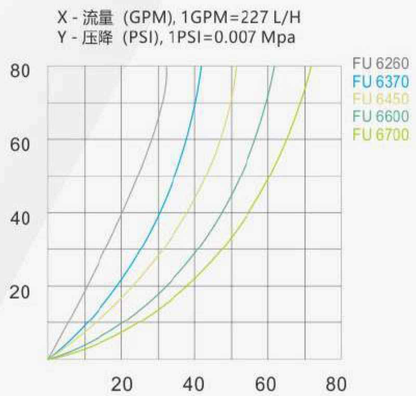

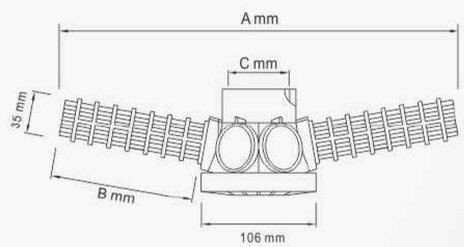

FU 8450

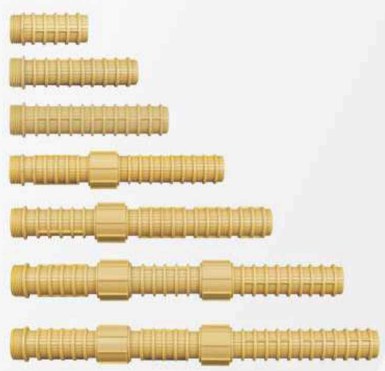

8爪 顶装式八爪下布水器(高流速)
TOP-MOUNTED EIGHT-CLAW LOWER DISTRIBUTOR(HIGH FLOW)

型号 MODEL	A	B	C	支管缝细 GAP	开口 PORT	通用罐体 TANKS
FU 8260B	320	132	63	0.2/0.25/0.5mm	4" thread	16"–18"/ϕ400–ϕ450mm
FU 8370B	440	197	63	0.2/0.25/0.5mm	4" thread	21"/ϕ550mm
FU 8450B	510	227	63	0.2/0.25/0.5mm	4" thread	24"/ϕ600mm
FU 8600B	630	290	63	0.2/0.25/0.5mm	4" thread	30"/ϕ750mm
FU 8700B	760	353	63	0.2/0.25/0.5mm	4" thread	36"/ϕ900mm
FU 8800B	870	416	63	0.2/0.25/0.5mm	4" thread	40"/ϕ1000mm
FU 8900B	1000	479	63	0.2/0.25/0.5mm	4" thread	48"/ϕ1200mm

备注：主体缝隙宽度有三种：0.2、0.25、0.5mm 默认标准为0.25mm
We have three gap type for screen:0.2mm, 0.25mm, 0.5mm, our stand gap is 0.25mm

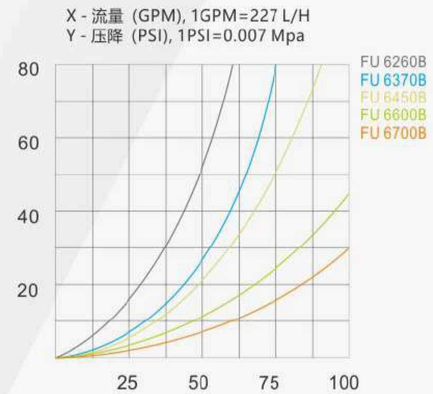

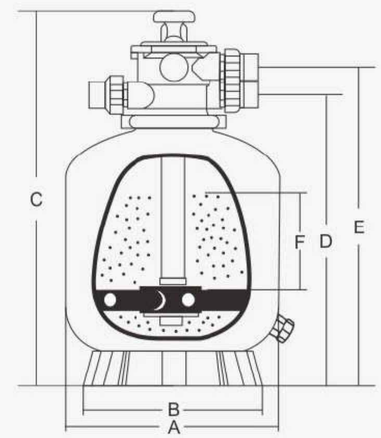

FU 8600B

6爪 侧装式六爪下布水器
SIDE-MOUNTED SIX-CLAW LOWER DISTRIBUTOR

型号 MODEL	A	B	C	支管缝细 GAP	开口 PORT	通用罐体 TANKS
FD 6260	255	99	63	0.25mm	4" thread	12"–16"/ϕ300–ϕ400mm
FD 6370	365	155	63	0.25mm	4" thread	18"–21"/ϕ450–ϕ550mm
FD 6450	450	200	63	0.25mm	4" thread	24"/ϕ600mm
FD 6600	610	280	63	0.25mm	4" thread	30"/ϕ750mm
FD 6700	700	325	63	0.25mm	4" thread	36"/ϕ900mm
FD 6800	850	400	63	0.25mm	4" thread	40"/ϕ1000mm
FD 6900	940	445	63	0.25mm	4" thread	48"/ϕ1200mm

备注：如需带负压阀请在型号后面加“F”字母，“FD6450F”

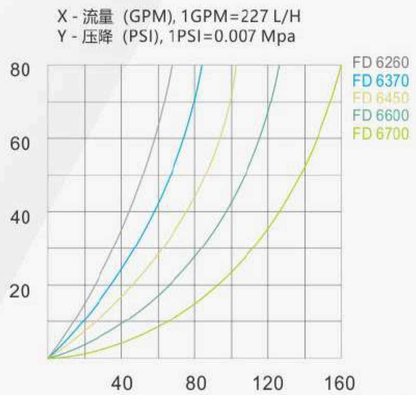

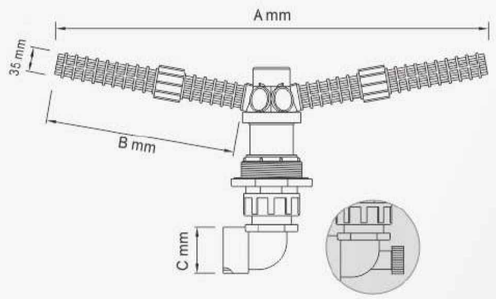

带负压阀
Vacuum Breaker.

专用扳手

FD 6600

防罐体真空
负压阀



6爪 侧装式六爪下布水器(高流速)
SIDE-MOUNTED SIX-CLAW LOWER DISTRIBUTOR(HIGH FLOW)

型号 MODEL	A	B	C	支管缝细 GAP	开口 PORT	通用罐体 TANKS
F 11036	310	132	63	0.2/0.25/0.5mm	4" thread	16"–18"/ϕ400–ϕ450mm
F 11037	430	197	63	0.2/0.25/0.5mm	4" thread	21"/ϕ550mm
F 11038	500	227	63	0.2/0.25/0.5mm	4" thread	24"/ϕ600mm
F 11039	620	290	63	0.2/0.25/0.5mm	4" thread	30"/ϕ750mm
F 11040	750	353	63	0.2/0.25/0.5mm	4" thread	36"/ϕ900mm
F 11041	870	416	63	0.2/0.25/0.5mm	4" thread	40"/ϕ1000mm
F 11042	990	479	63	0.2/0.25/0.5mm	4" thread	48"/ϕ1200mm

备注：如需带负压阀请在型号后面加“F”字母，“F11036F”

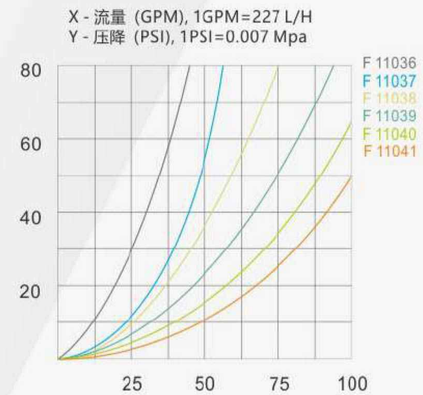

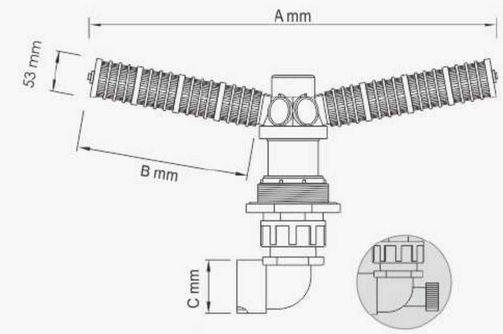

带负压阀
Vacuum Breaker

专用扳手

F 11040

防罐体真空
负压阀

备注：主体缝隙宽度有三种：0.2、0.25、0.5mm 默认标准为0.25mm
We have three gap type for screen:0.2mm, 0.25mm, 0.5mm, our stand gap is 0.25mm

8爪 顶装式八爪下布水器
TOP-MOUNTED EIGHT-CLAW LOWER DISTRIBUTOR

型号 MODEL	A	B	C	支管缝细 GAP	开口 PORT	通用罐体 TANKS
FU 5671	520	227	90	0.2/0.25/0.5mm	6" flange	24"/ϕ600mm
FU 5672	650	290	90	0.2/0.25/0.5mm	6" flange	30"/ϕ750mm
FU 5673	770	353	90	0.2/0.25/0.5mm	6" flange	36"/ϕ900mm
FU 5674	890	416	90	0.2/0.25/0.5mm	6" flange	40"/ϕ1000mm
FU 5675	1010	497	90	0.2/0.25/0.5mm	6" flange	48"/ϕ1200mm
FU 5676	1130	542	90	0.2/0.25/0.5mm	6" flange	56"–60"/ϕ1400–ϕ1500mm
FU 5678	1260	605	90	0.2/0.25/0.5mm	6" flange	63"–80"/ϕ1600–ϕ2000mm

备注：主体缝隙宽度有三种：0.2、0.25、0.5mm 默认标准为0.25mm
We have three gap type for screen:0.2mm, 0.25mm, 0.5mm, our stand gap is 0.25mm

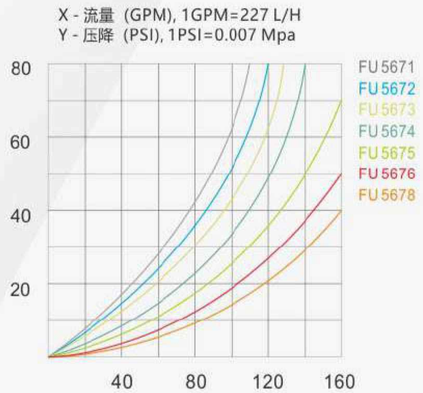

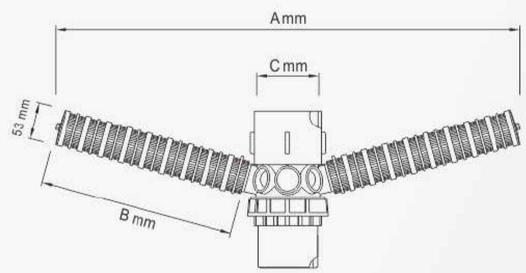

FU 5674 0.5mm

FU 5675



16爪 顶装式十六爪下布水器
TOP-MOUNTED SIXTEEN-CLAW LOWER DISTRIBUTOR

型号 MODEL	A	B	C	支管缝细 GAP	开口 PORT	通用罐体 TANKS
FU 5671-2	520	227	90	0.2/0.25/0.5mm	6" flange	24"/ϕ600mm
FU 5672-2	650	290	90	0.2/0.25/0.5mm	6" flange	30"/ϕ750mm
FU 5673-2	770	353	90	0.2/0.25/0.5mm	6" flange	36"/ϕ900mm
FU 5674-2	890	416	90	0.2/0.25/0.5mm	6" flange	40"/ϕ1000mm
FU 5675-2	1010	497	90	0.2/0.25/0.5mm	6" flange	48"/ϕ1200mm
FU 5676-2	1130	542	90	0.2/0.25/0.5mm	6" flange	56"-60"/ϕ1400-ϕ1500mm
FU 5678-2	1260	605	90	0.2/0.25/0.5mm	6" flange	63"-80"/ϕ1600-ϕ2000mm

备注：主体缝隙宽度有三种：0.2、0.25、0.5mm 默认标准为0.25mm
We have three gap type for screen:0.2mm, 0.25mm, 0.5mm, our stand gap is 0.25mm

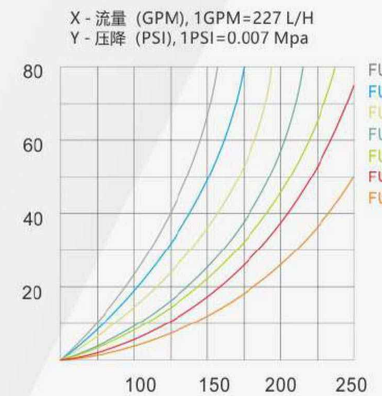

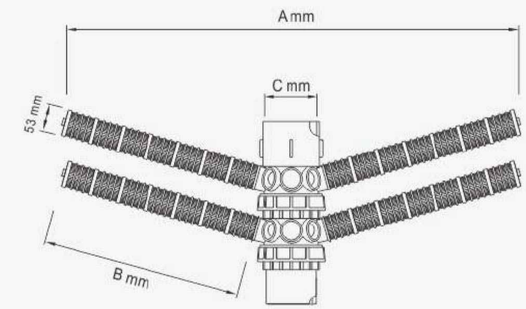

FU 5675-2 0.5mm

FU 5675-2



8爪 侧装式八爪下布水器
SIDE-MOUNTED EIGHT-CLAW LOWER DISTRIBUTOR

型号 MODEL	A	B	C	支管缝细 GAP	开口 PORT	通用罐体 TANKS
FD 5671	520	227	90/110/PT3"	0.2/0.25/0.5mm	6" flange	24"/ϕ600mm
FD 5672	650	290	90/110/PT3"	0.2/0.25/0.5mm	6" flange	30"/ϕ750mm
FD 5673	770	353	90/110/PT3"	0.2/0.25/0.5mm	6" flange	36"/ϕ900mm
FD 5674	890	416	90/110/PT3"	0.2/0.25/0.5mm	6" flange	40"/ϕ1000mm
FD 5675	1010	497	90/110/PT3"	0.2/0.25/0.5mm	6" flange	48"/ϕ1200mm
FD 5676	1130	542	90/110/PT3"	0.2/0.25/0.5mm	6" flange	56"–60"/ϕ1400–ϕ1500mm
FD 5678	1260	605	90/110/PT3"	0.2/0.25/0.5mm	6" flange	63"–80"/ϕ1600–ϕ2000mm

备注：主体缝隙宽度有三种：0.2、0.25、0.5mm 默认标准为0.25mm
We have three gap type for screen:0.2mm, 0.25mm, 0.5mm, our stand gap is 0.25mm

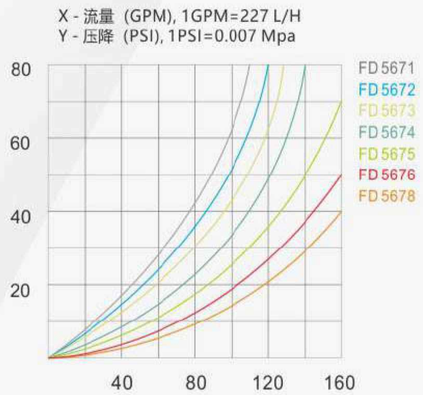

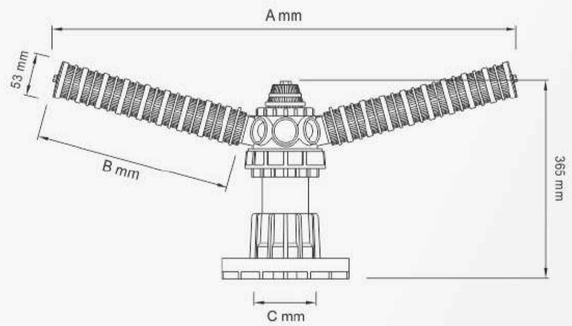

FD 5675 0.5mm

FD 5675



16爪 侧装式十六爪下布水器
SIDE-MOUNTED SIXTEEN-CLAW LOWER DISTRIBUTOR

型号 MODEL	A	B	C	支管缝细 GAP	开口 PORT	通用罐体 TANKS
FD 5671-2	520	227	90/110/PT3"	0.2/0.25/0.5mm	6" flange	24"/ϕ600mm
FD 5672-2	650	290	90/110/PT3"	0.2/0.25/0.5mm	6" flange	30"/ϕ750mm
FD 5673-2	770	353	90/110/PT3"	0.2/0.25/0.5mm	6" flange	36"/ϕ900mm
FD 5674-2	890	416	90/110/PT3"	0.2/0.25/0.5mm	6" flange	40"/ϕ1000mm
FD 5675-2	1010	497	90/110/PT3"	0.2/0.25/0.5mm	6" flange	48"/ϕ1200mm
FD 5676-2	1130	542	90/110/PT3"	0.2/0.25/0.5mm	6" flange	56"-60"/ϕ1400-ϕ1500mm
FD 5678-2	1260	605	90/110/PT3"	0.2/0.25/0.5mm	6" flange	63"-80"/ϕ1600-ϕ2000mm

备注：主体缝隙宽度有三种：0.2、0.25、0.5mm 默认标准为0.25mm
We have three gap type for screen:0.2mm, 0.25mm, 0.5mm, our stand gap is 0.25mm

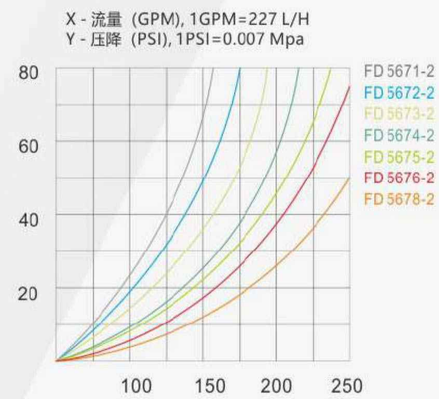

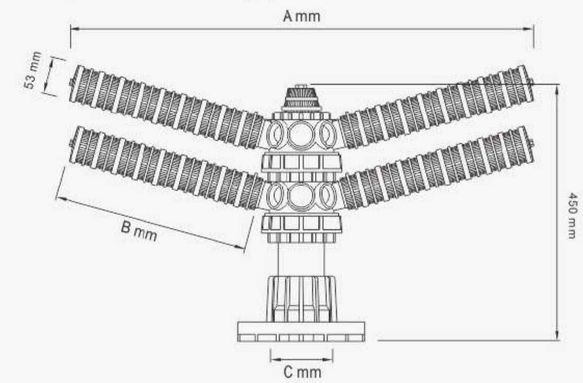

FD 5675-2 0.5mm

FD 5675-2



其他布水器
OTHER DISTRIBUTORS

G2"内螺纹链接布水器
G2"INTERNAL THREAD CONNECTION

G3"外螺纹链接上布水器
G3"EXTERNAL THREAD TOP CONNECTION

G2"内螺纹链接下布水器
G2"INTERNAL THREAD LOWER CONNECTION

G3"外螺纹链接下布水器
G3"EXTERNAL THREAD LOWER CONNECTION

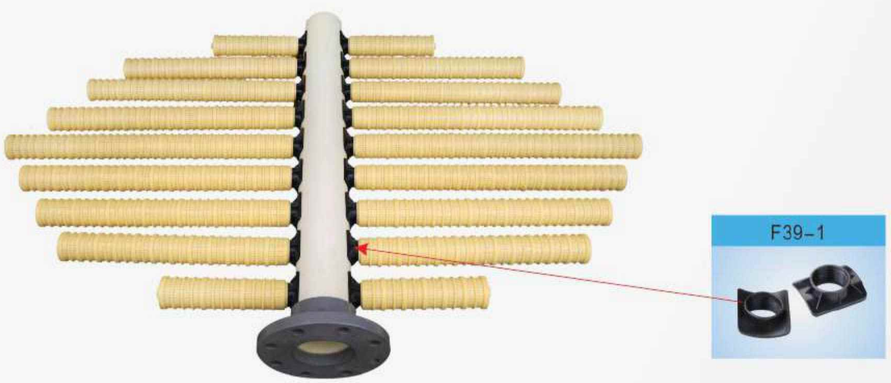

鱼刺型布水器
FISHBONE-TYPE DISTRIBUTOR

布水管
WATER DISTRIBUTION TUBES

A型	6260	6370	6450	6600	6700	6800	6900
L	100	155	200	280	325	400	430
接口	G1"	G1"	G1"	G1"	G1"	G1"	G1"



材质Material: PP, PVDF

B型	06网	08网	10网	12网	14网	16网	→
L	210	273	336	399	462	525	+63
接口	G1"	G1"	G1"	G1"	G1"	G1"	G1"



材质Material: PP, PVDF

D型	01网	03网	05网	07网	09网	11网	→
L	100	205	310	415	520	625	+105
接口	G2"	G2"	G2"	G2"	G2"	G2"	G2"

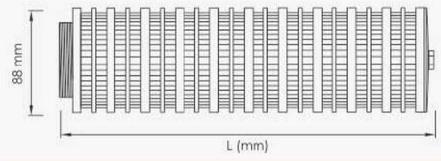

注：管体排水缝隙宽度有以下三种 0.2 0.25 0.5mm 默认标准为0.25mm
Notes: drain gaps on the pipe have three avaitabes widthes,0.2 0.25 0.5mm

黑二通
TANK HEAD

型号 MODEL	适用罐口 OPENING	中心管 TUBE	接口 PORT	材质 MATERIAL
F 8800-1/2	2.5"	26.7mm	G1/2"	ABS
F 8800-3/4	2.5"	26.7mm	G3/4"	ABS
F 8800-1	2.5"	26.7mm	G1"	ABS
F 8801-1	2.5"	32.0mm	G1"	ABS
FX 8800-3/4	2.5"	26.7mm	G3/4"	ABS
FX 8800-1	2.5"	26.7mm	G1"	ABS
F 8802	4"	50.0mm	G2"	ABS





FX 8800-1

F 8800-½

F 8800-1

F 8801-1

F 8802

其它配件
OTHER ACCESSORIES

BJ-4 4"-2.5"变径 Reducing

DT-4 4"堵头 Plug

BJ-6 6"-4"变径 Reducing

DT-6 6"堵头 Plug

双罐串联件
Horizontal tank Connector

加高件
High increaser for vessel 2.5"

6"法兰 Flange
90/110/PT3"/NPT3

F2601 配件 Autotrol accessories

其它配件
OTHER ACCESSORIES

DN32 小漏斗
DN32 Tank Funnel
适用于ϕ27，ϕ32，ϕ40，ϕ50中心管

DN50 大漏斗
DN50 Tank Funnel
Used for ϕ27，ϕ32，ϕ40，ϕ50 Central tube.

26.7MM-G3/4″ 转换接头
Connector 26.7MM-G3/4″

3/8″ 排污接口
Overflow Connector 3/8″

3/8″ 直角弯头
Connector 3/8″

18602 弯头
18602 Connector

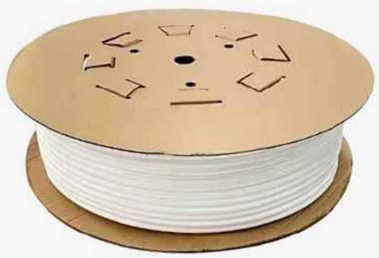

吸盐管3/8"
Salt suction tube 3/8""

排污管1/2"
Sewer pipe 1/2"

布水器罐体内安装指南
GUIDE FOR INSTALLATION OF WATER TANK BODY.

- 请您根据以下图示选购、安装适合您需要的布水器，如有任何疑问请随时联系我们。
- Please ordering / installing distributors according to the following illustrations, or any question, contact us.

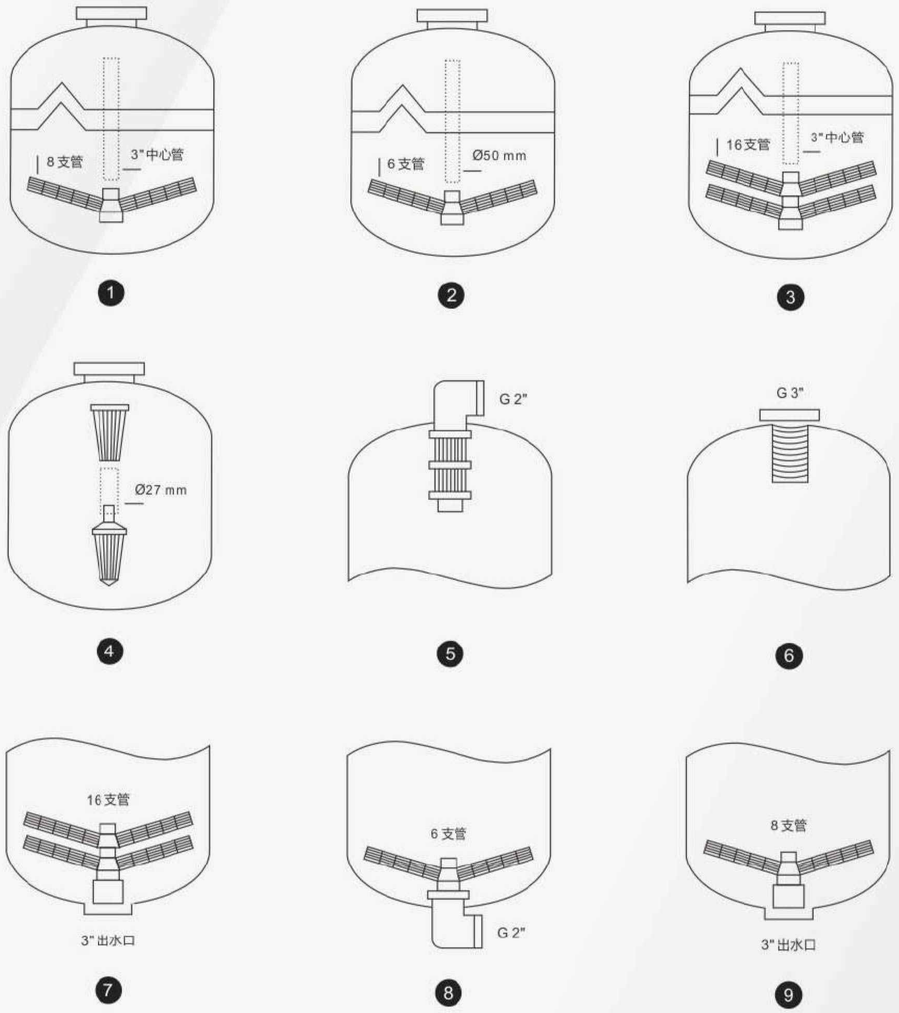

水帽
FILTER-NOZZLES

型号 MODEL	出水量 WATER OUTPUT	口径 caliber	缝隙 GAP	材质 MATERIAL
F 0505	0.5T/H	25	0.2MM	PP

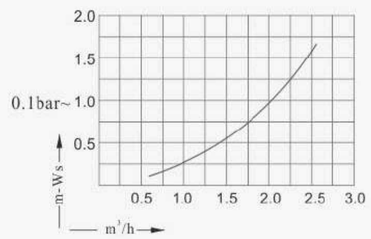

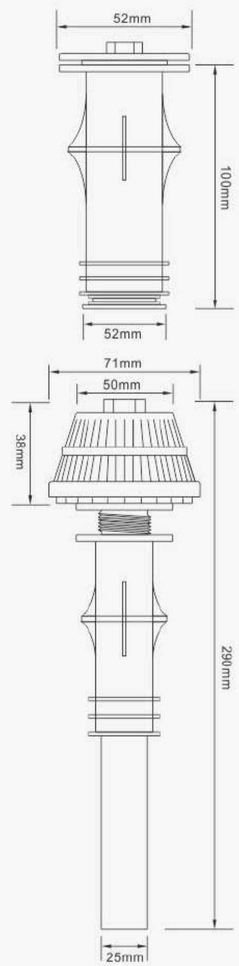

水帽
FILTER NOZZLE

型号 MODEL	流量 FLOW	螺纹 THREAD	缝隙 GAP	材质 MATERIAL
F 0507	0.5 T/H	G3/4"	0.25mm/0.55mm	PP
F 0508	0.5 T/H	G1"	0.25mm/0.55mm	PP
F 0509	0.5 T/H	G1"	0.25mm/0.55mm	PP



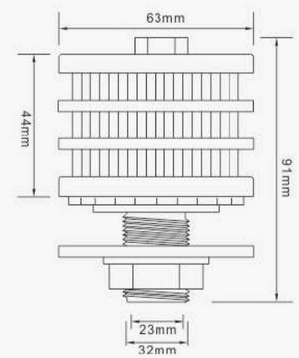

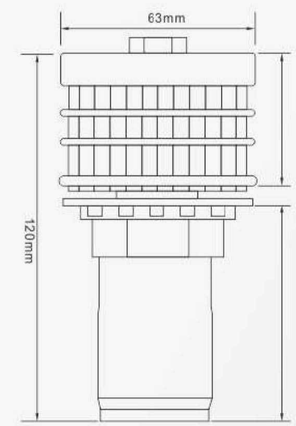

F0507

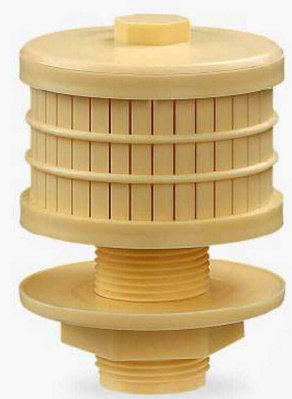

F0508

F0509

水帽
FILTER NOZZLE

型号 MODEL	出水量 WATER OUTPUT	螺纹 THREAD	缝隙 GAP	材质 MATERIAL
F 0501	0.5T/H	G3/4"	0.28	ABS/PP
F 0503	1T/H	G1"	0.28mm	ABS/PP/PVDF

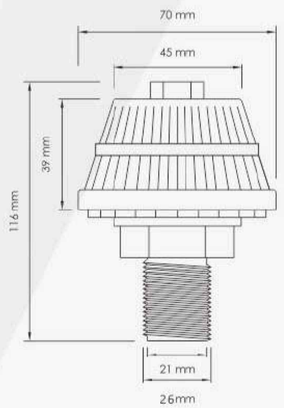

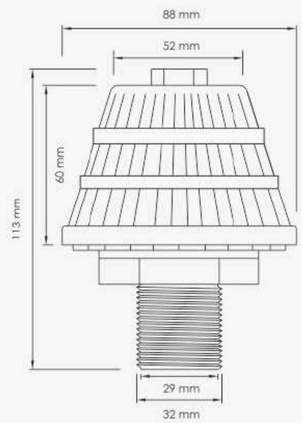

F0501

F0503

F0503(PVDF)

水帽
FILTER NOZZLE

型号 MODEL	出水量 WATER OUTPUT	螺纹 THREAD	缝隙 GAP	材质 MATERIAL
F 0504	1T/H	G1"	0.28mm	ABS/PP
F 0510	2-4T/H	G3/4"	0.25/0.5mm	ABS

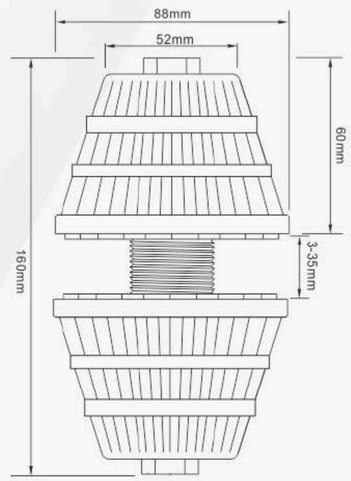

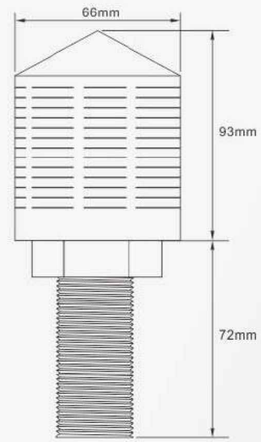

F0504

F0510